



Fiberglass

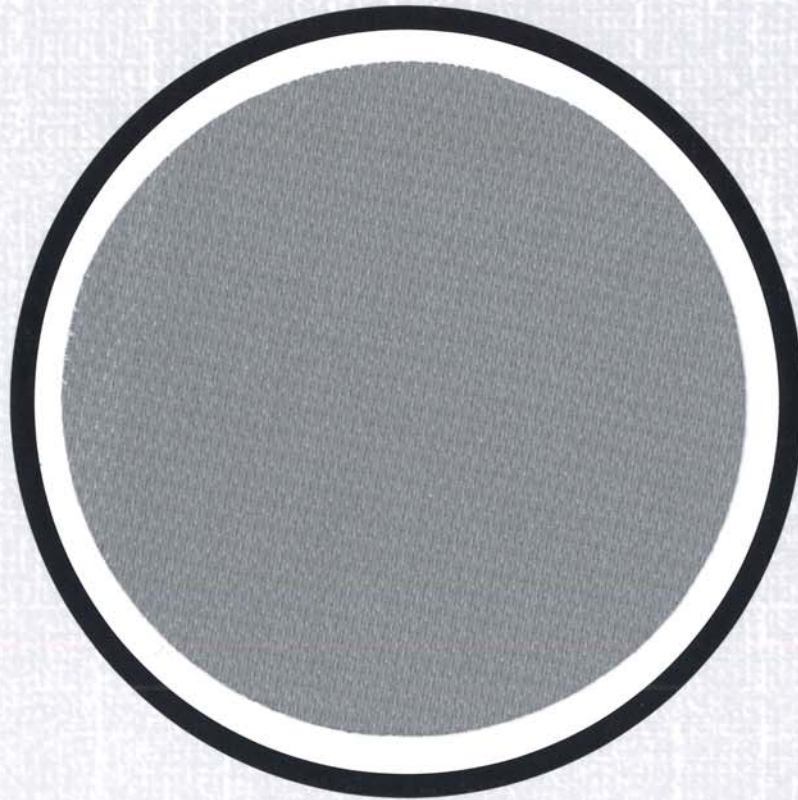


GRAY 112 (in stock)

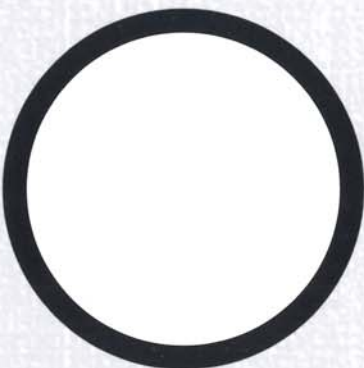

WHITE 113
Special Order



BLUE 115
Special Order

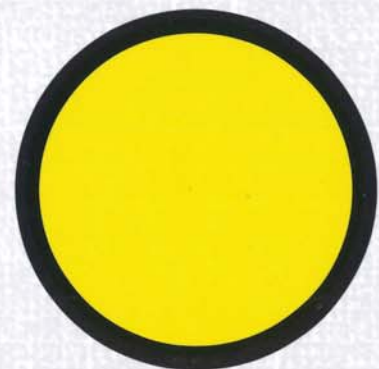

YELLOW 118
Special Order

FIBERGLASS

CONSTRUCTION Gray Silicone Coated Fiberglass

WEIGHT 16.5 oz. per sq. yard

FLAME RESISTANCE UL Classified (file R20672)
ASTEM-84 Class A
(Building Material)



MELT TEMP. 500 Degrees F

TEAR STRENGTH Warp 50 lb.
Fill 25 lb.

These are typical property values and are intended as guides only.

DISTRIBUTED BY:

