




Polyester (Coated)

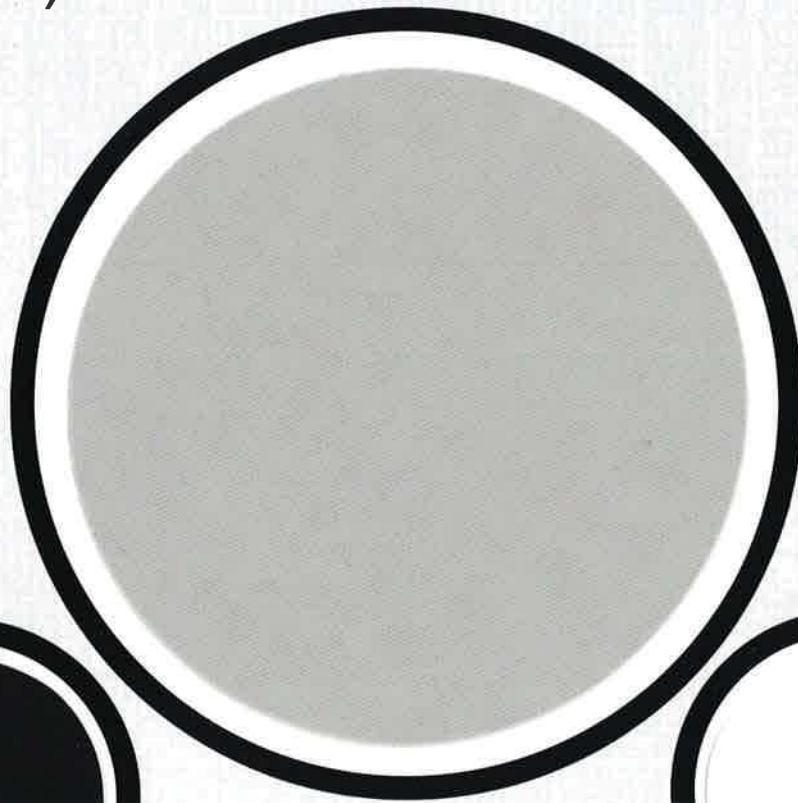

GRAY 312

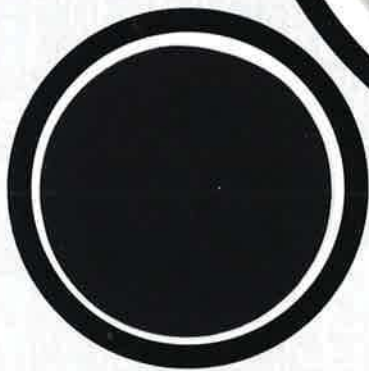

BLACK 311

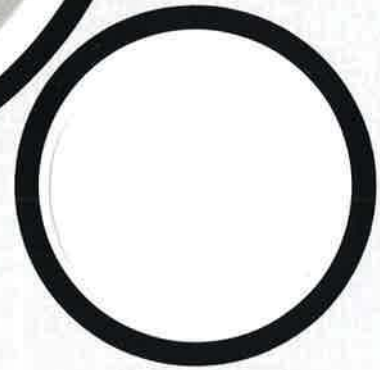

WHITE 313



DK.GREEN 314



MED. BLUE 315




TAN 316



RED 317



PURPLE 318

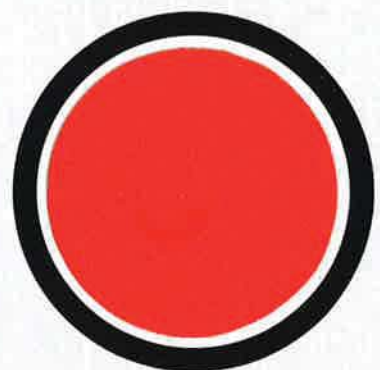

ORANGE 319

POLYESTER

CONSTRUCTION 300 denier Coated Polyester
With EPA approved
antimicrobial agent

WEIGHT 7 oz. per sq. yard

FLAME RETARDANCY Cal. Fire Marshall, NFPA-701
CPAI-84, ASTM E84, CLASS 1
ICCes Report (ESR-2646) AC-167
Meets NFPA 90A / 90B building materials
Specs. For flame spread (25) and smoke
development (50)
CAN/ULC S-109

MELT TEMP. 350 Degrees F

TONGUE TEAR..... Warp 43 lb.
Weft 48 lb. ASTM D2261-96

AIR PERMEABILITY.....@ 125 Pa 0 cfm /sq. ft.

These are typical property values and are intended as guides only.

DISTRIBUTED BY:

